



UNIVERSITI PUTRA MALAYSIA

**DEVELOPMENT OF A REAL-TIME EMBEDDED REMOTE
TRIGGERING AND MONITORING SYSTEM**

CHUI YEW LEONG

FK 2003 59

**DEVELOPMENT OF A REAL-TIME EMBEDDED REMOTE TRIGGERING
AND MONITORING SYSTEM**

By

CHUI YEW LEONG

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia in
Fulfilment of the Requirement for the Degree of Master of Science**

July 2003



Dedicated to,

My Family

Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfilment of the requirement for the degree of Master of Science

**DEVELOPMENT OF A REAL-TIME EMBEDDED REMOTE TRIGGERING
AND MONITORING SYSTEM**

By

CHUI YEW LEONG

July 2003

Chairman: Associate Professor Abdul Rahman Ramli, Ph.D.

Faculty: Engineering

The Internet has become the latest medium for communication with advanced features such as file transfer, transaction application, advertising and much more. Recently, quite a number of Internet applications related to remote triggering and monitoring system have been developed. The integration of Internet technology and embedded system concept provides a way for the development of Network Embedded System. In this case, various types of electrical or electronic appliances can be connected to the Network Embedded System to obtain network-connectivity or Internet-ready functionality. For system development purpose, SC12 from BECK-IPC is selected for Network Embedded System implementation.

The ideal system can be built with improved diagnostic features and flexibility in terms of configuration parameters. So, this research will cover intelligent system design,

protocol stack implementation and manipulation techniques, and embedded system development in details.

A real-time embedded remote triggering and monitoring system has been developed. This project is an integration of three systems: Network Embedded System (NES), Local Connectivity System Toolkit (LCS) and client-side application. NES provides network connectivity features to LCS and ready to be triggered and monitored by remote client-side application. So, electrical or electronic appliances can be attached to LCS for network/Internet connectivity purpose. On the other hand, client-side application provides a user-friendly Graphic User Interface (GUI) to enhance the usability of the system.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai
memenuhi keperluan untuk ijazah Master Sains

**PEMBANGUNAN SISTEM PENGAKTIFAN DAN PEMANTAUAN JARAK
JAUH YANG MASA SEBENAR DENGAN SYSTEM TERBENAM**

Oleh

CHUI YEW LEONG

Julai 2003

Pengerusi: Profesor Madya Abdul Rahman Ramli, Ph.D.

Fakulti: Kejuruteraan

Internet telah menjadi bahantara komunikasi terkini dengan pelbagai keistimewaan seperti pemindahan fail, aplikasi urusniaga, periklanan dan sebagainya. Mutakhir ini, terdapat pelbagai aplikasi Internet yang melibatkan sistem pengaktifan dan pemantauan jarak jauh. Pembangunan teknologi Internet dengan konsep sistem terbenam telah membekal kemampuan dalam pembangunan Sistem Terbenam Rangkaian. Dalam kes ini, mekanisma pengaktifan dan pemantauan jarak jauh melalui Internet terhadap pelbagai jenis alat elektrik adalah berkemungkinan dilaksanakan dalam sistem terbenam. Untuk tujuan pembangunan sistem, SC12 dari BECK-IPC telah dipilih dalam pembinaan Sistem Terbenam Rangkaian.

Dalam sistem yang ideal, keupayaan pemeriksaan dan mudah digunakan dalam membuat konfigurasi terhadap parameter sistem adalah penting. Keberkesanan

mekanisme pengaktifan dan memantauan adalah subjek dalam penyelidikan dan pembangunan projek ini. Selain itu, keistimewaan rangkaian Internet dalam pembangunan sistem tersebut adalah dipentingkan.

Tesis ini menerokai keupayaan penyambungan Internet untuk sistem pengaktifan dan pemantauan jarak jauh. Sistem yang dibangunkan ini terdiri daripada tiga bahagian utama iaitu Sistem Terbenam Rangkaian, Peranti Penyambungan Sistem dan aplikasi GUI. Apabila sistem ini disambungkan dengan Internet, ia dapat melaksanakan proses pengaktifan and pemantauan terhadap Peranti Penyambungan Sistem. Peralatan-peralatan elektrik boleh disambung dengan peranti penyambungan untuk tujuan sistem berpanduan Internet. Selain aplikasi GUI yang mudah diguna telah menambah keberkesanan terhadap sistem operasi.

ACKNOWLEDGEMENTS

First of all, I would like to express my utmost thanks and gratitude to my family for giving me the support to finish this thesis successfully.

The author gratefully wish to express this profound appreciation and gratitude to his supervisor, Dr. Abdul Rahman Ramli, for his supervision, guidance, supporting and constructive suggesting and comment throughout the duration of the project until it turn to real success.

The author also indebted to members of his supervisory committee, Dr Adznan and Pn. Wan Azizun for their guidance, prompt decision and valuable assistance during this period.

Appreciation also to the assistance rendered by the respective lecturers, staffs, technicians of ITMA for providing the facilities required for undertaking this project.

I certified that an Examination Committee met on 9th July 2003 to conduct the final examination of Chui Yew Leong on his Master of Science thesis entitled “Development of a Real-Time Embedded Remote Triggering and Monitoring System” in accordance with Universiti Pertanian Malaysia (Higher Degree) Act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The committee recommends that the candidate be awarded the relevant degree. Members of the Examination Committee are as follows:

Samsul Bahari Mohd. Noor, Ph.D.

Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Abdul Rahman Ramli, Ph.D.

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Adznan Jantan, Ph.D.

Faculty of Engineering
Universiti Putra Malaysia
(Member)

Wan Azizun Wan Adnan

Faculty of Engineering
Universiti Putra Malaysia
(Member)



GULAM RUSUL RAHMAT ALI, Ph.D.

Professor/Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: '29 OCT 2003

This thesis submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirements for the degree of Master of Science. The members of the Supervisory Committee are as follows:

Abdul Rahman Ramli, Ph.D.

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Adznan Jantan, Ph.D.

Faculty of Engineering
Universiti Putra Malaysia
(Member)

Wan Azizun Wan Adnan

Faculty of Engineering
Universiti Putra Malaysia
(Member)



AINI IDERIS, Ph.D.

Professor/Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: **14 NOV 2003**

DECLARATION

I hereby declare that the thesis is based on my original work except for quotations and citations which have been duly acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions.



Chui Yew Leong

Date: 20 OCT 2003

TABLE OF CONTENTS

	Page
DEDICATION	ii
ABSTRACT	iii
ABSTRAK	v
ACKNOWLEDGEMENTS	vii
APPROVAL	viii
DECLARATION	x
LIST OF TABLES	xiv
LIST OF FIGURES	xv
 CHAPTER	
 I. INTRODUCTION	 1
1.1 Objective	2
1.2 Overview of Real-Time Embedded Remote Triggering And Monitoring System	2
1.3 Importance of Real-Time Embedded Remote Triggering And Monitoring System	4
1.4 Thesis Organization	4
 II. LITERATURE REVIEW	 5
1.5 Network Embedded System	16
1.6 Real Time Operating System (RTOS)	20
2.3 Internet Technology	22
2.3.1 Protocol Stack	23
2.3.1.1 Connection-Oriented and Connectionless Protocol	25
2.3.1.2 Routable and Non-routable Protocol	27
2.3.2 Network Routing	27
2.3.3 Encapsulation	28
2.3.4 Fragmentation	29
2.3.5 Source Routing	30
2.4 Client-Server Implementation	31
2.5 Digital Signal Switching Control	32
2.5.1 Signal Translation	35
2.5.2 Error Recovery	37
2.6 Conclusion	39



III. METHODOLOGY	40
3.1 Operation Mechanism	41
3.2 System Implementation	42
3.2.1 Server Implementation	42
3.2.1.1 Application Of Network Embedded System	43
3.2.1.2 RTOS Implementation	47
3.2.1.3 Network Application Programming	53
3.2.2 Connectivity Toolkit	62
3.2.2.1 System Design	63
3.2.2.2 Microcontroller Programming	65
3.2.3 Client-Side Development	66
3.3 System Integration	69
3.4 System Optimization	72
3.5 Summary	75
 IV. RESULT AND DISCUSSION	 76
1.7 Operation Result	76
1.7.1 Respond Time	81
1.7.2 Head Generation	82
1.7.3 Data Transformation	87
4.2 Discussion	96
4.2.1 System Efficiency	96
4.2.2 System Stability	97
4.2.3 Security Concern	99
4.3 Conclusion	101
 V. CONCLUSION AND RECOMMENDATION	 102
5.1 Conclusion	102
5.2 Advantages Of The System	104
5.3 Recommendation	105
 REFERENCES/BIBLIOGRAPHY	 107
 APPENDIX-A TCP Server	 111
APPENDIX-B PPP Client	116
APPENDIX-C TCP/IP Stack	121
APPENDIX-D Hardware Interface API	141
APPENDIX-E RTOS API	148
APPENDIX-F DNS Service	162
APPENDIX-G Serial Interface API	169

APPENDIX-H	PPP Client Multitasking Module	176
APPENDIX-I	Local Connectivity Toolkit Module	177
APPENDIX-J	Client-side GUI Application	184
APPENDIX-K	System Configuration Tool	187
VITA		210

LIST OF TABLE

Table	Page
2.1 Market-Ready embedded remote triggering and monitoring system	10
2.2 Comparison of unit channel per module for market-ready products	12
2.3 Network Embedded System in the market	18
3.1 Some of the protocol API from network embedded system	54
3.2 Coding of connectivity toolkit	62
4.1 Respond time according to the type of network connection	81
4.2 Respond time of NX-100 (TOA Corporation)	82
4.3 Analytical ambient temperature result of real-time embedded remote triggering and monitoring system for 24 hours	84
4.4 Analytical unit temperature result of real-time embedded remote triggering and monitoring system for 24 hours	84
4.5 List of feedback signal corresponding to the relays status in connectivity toolkit	94
4.6 Types of testing method for system operation stability	98
4.7 Security checklist of SC12 network embedded system	99
4.8 Protection methods of security risk	100

LIST OF FIGURE

Figure	Page
1.1 Block diagram of a complete Internet connectivity system	3
2.1 LAN connection issue of unavailability of smart connection management	11
2.2 Modem dial-up connection issue of unavailability of smart connection Management	11
2.3 Insufficient unit channel per module in multipurpose application	12
2.4 Operation mechanism of remote dial-up activation	13
2.5 System block diagram of 16-operation channel per module	14
2.6 Mechanism of run-time system failure detection	15
2.7 Architecture of Real Time Operation System (RTOS) for SC12	21
2.8 OSI reference model	24
2.9 Internet protocol stack corresponding to the OSI/RM	25
2.10 Level of multiplexing and demultiplexing of TCP/IP	29
2.11 Client-server configuration on Internet	31
2.12 Mechanism of signal switching control in connectivity toolkit	33
2.13 Mechanism of synchronous triggering method	34
2.14 Mechanism of asynchronous triggering	35
2.15 Task of signal converter	36
2.16 Mechanism of error recovery associated with the strong coding selection and data integrity	37
2.17 Comparison of strong code and weak code	38



3.1	Operation of real-time connection-oriented Internet connectivity embedded triggering and monitoring system	41
3.2	Process of server implementation	43
3.3	Pin configuration of SC12	43
3.4	System operation block diagram of SC12	44
3.5	System memory configuration and basic I/O of SC12	45
3.6	Read and write mechanism of 8-bit mode with ALE	46
3.7	Power-up and power-down sequence of SC12	47
3.8	I/O map of system architecture	47
3.9	Process management block of RTOS	49
3.10	Mechanism of kernel checking process	49
3.11	Code sharing process in memory	50
3.12	Concept of virtual file system in file sharing	51
3.13	Mechanism of multitasking process in the order of RTOS	53
3.14	Flow diagram of the mechanism of TCP server	57
3.15	Operation of PPP client in flow diagram	61
3.16	System architecture block diagram for connectivity toolkit	63
3.17	Interactive mechanism of I/O interface and connectivity toolkit	64
3.18	Standard IDE of Visual Basic in developing the client-side	68
3.19	System level client-side application for system parameters configuration	69
3.20	Logical linking between the remote terminal and network embedded system	
3.21	Logical linking and system operation between network embedded system and connectivity toolkit	70

3.22	System operation of real-time connection-oriented embedded remote triggering and monitoring system	71
3.23	Ripples along the output power	72
3.24	Mechanism of error checking to trap system failure	74
4.1	User interface of the standard client-side of Internet connectivity triggering and monitoring system	77
4.2	Establish connection from client-side to server	78
4.3	The operation of triggering first relay in the remote system toolkit	79
4.4	Result of trigger off all the 16 relays in connectivity toolkit	80
4.5	Respond time according to the type of network connection in chart form	81
4.6	Analytical ambient temperature result in line chart	85
4.7	Analytical unit temperature result in line chart	86
4.8	Login screen of telnet client when started to establish a connection to the telnet server	87
4.9	Connection detection result on monitoring terminal	88
4.10	Data obtained by network embedded system to trigger on the first relay	89
4.11	Data obtained by network embedded system to trigger on the second relay	90
4.12	Result of data transformation to trigger on the first relay	91
4.13	Result of data transformation to trigger on the second relay	91
4.14	The generated feedback signal by connectivity toolkit responds to trigger on first relay	92
4.15	The generated feedback signal by connectivity toolkit responds to trigger on second relay	93
4.16	The generated feedback signal by connectivity toolkit responds to trigger off all relays	94

4.17	Result respond to the event of reset all of the relays	95
4.18	Transmission method consisting the system operation	96

CHAPTER 1

INTRODUCTION

Recently, the development of Internet-based remote triggering and monitoring system becomes one of the hottest research topics [1]. The Internet provides convenience in a time when everyone is desperate for easy solutions. As the years pass, peoples are experimenting in more adventurous ways on the Internet, making it even better. That's what makes the Internet-base connectivity theme so interesting. There are no limits other than imagination.

In fact, the trend of network connectivity technology is going forward to the development of embedded system that meets the requirement of globalization [2]. User will be able to access information and services virtually anywhere and at any time via any device, whether it is PCs, laptops, PDAs or phones. Many computers in ubiquitous environments are embedded in hand-held devices as smart appliance [3]. Thus, traditional system is no longer compromise the demand of market to accomplish a wonderful globalization system. This thesis describes the design and implementation of system architecture providing the real-time embedded remote triggering and monitoring service through network embedded system.

1.1 Objective

The objectives of this project are:

- To develop and implement a network-based real-time embedded remote triggering and monitoring system.
- To develop a client-side application to manage the operation of remote triggering and monitoring.
- To enhance and optimize the performance of the developed system.

1.2 Overview of Real-Time Embedded Triggering and Monitoring System

Real-Time Embedded Triggering and Monitoring System is an advance technology that allows remote user to manage a local system through the Internet/Intranet connection. The system is generally consisting of three main blocks: Remote Terminal (RT), Internet Connectivity Module (ICM) and Local Connectivity System Toolkit (LCST). Figure 1.1 shows the block diagram of a complete real-time embedded triggering and monitoring system.

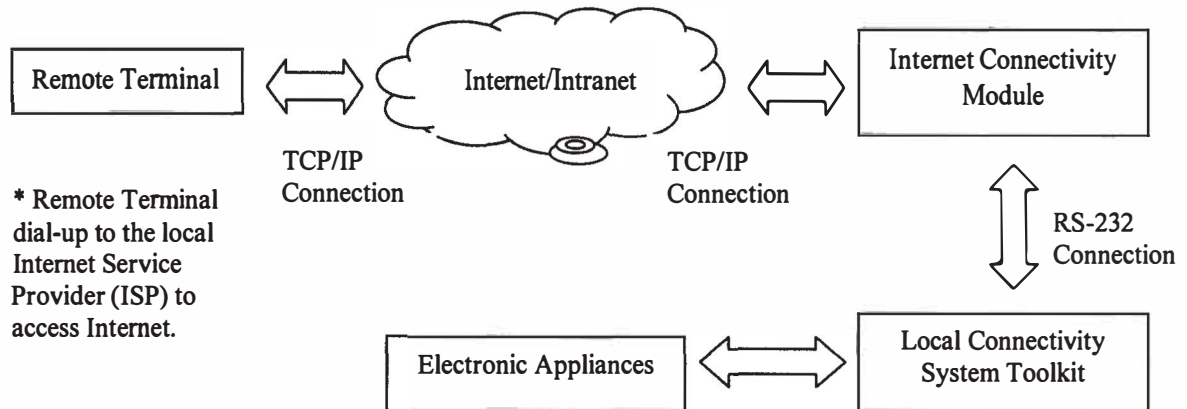


Figure 1.1: Block diagram of a complete Internet connectivity system

Remote user can dial-up to the local Internet Service Provider (ISP) to get access to the Internet connection. Through the Internet connection, the remote user allows to make a real-time connection to the ICM. In this case, the ICM will perform TCP to Serial or Serial to TCP Conversion between RT and LCST bi-directionally. A full-duplex connection established for remote user to trigger and monitor the status of electronic appliances in the most effective way.

The system is defined as real-time system because of connection-oriented protocol (TCP) is applied to accomplish the connection between RT and ICM. As a result, any operation from RT will affect the status of LCST immediately. Similarly, the status of LCST will feedback to RT for run-time monitoring purpose.

1.3 Importance of Real-Time Embedded Triggering and Monitoring System

The ability of triggering and monitoring a remote system is very useful in the sense of system availability mobility and efficiency. Achievement of remote triggering and monitoring provides the possibility of multiple systems to be managed by a single user (System Centralization) [4].

1.4 Thesis Organization

. This thesis is organized as follows: Chapter 1 gives a general background and overview of the thesis. It highlights some of the main benefits in using real-time embedded triggering and monitoring system. Chapter 2 covers the literature review. Further, it looks at some optimal remote triggering and monitoring system and network embedded system concept. Chapter 3 consists of the methodology used in designing the proposed system. The results and discussion are fully documented in Chapter 4. Finally, Chapter 5 summarizes the finding. Conclusion and suggestion for future studies are also given.

CHAPTER 2

LITERATURE REVIEW

There are various types of technology to implement modern remote triggering and monitoring system. For long distance purpose, Supervisory Control And Data Acquisition System (SCADA), MRC-2 System, Distributed Control System (DCS), Wireless and Mobile Control System, and Internet/Intranet Control System are within the most famous modern remote control system available in the market. However, X-10, IrDA, Bluetooth and WiFi are within the most popular technology implemented for short distance applications.

SCADA System refers to the combination of telemetry and data acquisition [5]. It consists of collecting information, transferring it back to a central side, carrying out necessary analysis and control, and then displaying this data on a number of operator screens. The SCADA system is used to monitor and control a plant or equipment. Control may be automatic or can be initiated by operator commands. Telemetry is usually associated with SCADA Systems. It is a technique used in transmitting and receiving information or data over a medium. The information can be measurements, such as voltage, speed or flow. These data are transmitted to another location through a medium such as cable, telephone or radio. Information may come from multiple locations.

MRC-2 System is a modular remote control system allowing maximum flexibility in interconnecting control and remote terminals [6]. The master controller PC control software emulates the control terminal and provides the user with a multi tasking system capable of time-oriented and event-oriented control functions.

DCS is usually used in factories and located within a more confined area [5]. It uses a high-speed communications medium, such as Local Area Network (LAN). A significant amount of closed loop control is present on the system. It may rely on a variety of communications links such as radio and telephone. Closed loop control is not a high priority in this system.

Wireless and Mobile Control System practice the technology of GSM to implement the anatomy of distributed control system [7]. The mechanism of GSM technology enables the globalization feature of effective remote control system.

Internet/Intranet Control System implements the backbone of communication link by using the existing technology of TCP/IP [8]. Web-Based Control System, Client-Server Service Control System and E-mail Control System are categorized in this type of control system. Web-Based Control System is implemented by using Common Gateway Interface (CGI) technology associated the practice of Web Browser. Client-Server Service Control System is developed with customize application specific program. User-defined data conversion and transferring methods are implemented to accomplish the mechanism of runtime operation. E-mail Control System applied the